



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

**MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION**

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

GAF Materials Corporation
1361 Alps Road
Wayne, NJ 07470

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: GAF Cobra Ridge Runner

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This renews NOA# 07-0326.02 and consists of pages 1 through 4.
The submitted documentation was reviewed by Alex Tigera.



NOA No.: 12-0718.03
Expiration Date: 11/01/17
Approval Date: 10/18/12
Page 1 of 4

ROOFING COMPONENT APPROVAL

Category: Roofing
Sub-Category: Ventilation
Material: Plastic
Minimum Slope: 3:12

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Cobra Ridge Runner	20' Length (Roll) 11.5" Width .7" Hieght	TAS 100	Low profile attic ridge vent in roll form for installation under ridge shingles.

MANUFACTURING LOCATION

1. Cumming, GA.

EVIDENCE SUBMITTED

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
ETC Laboratories, Inc.	ASTM D 1929	ETC-07-718-19959.0	09/27/07
	ASTM D635	ETC-07-718-19959.0	09/27/07
	ASTM D 2843	ETC-07-718-19959.0	09/27/07
PRI Construction Materials Technologies, Inc.	ASTM G 26	GAF-138-02-06	02/09/07
	TAS 100(A)	GAF-138-02-04	02/09/07



NOA No.: 12-0718.03
Expiration Date: 11/01/17
Approval Date: 10/18/12
Page 2 of 4

APPROVED APPLICATIONS

Tradename: Cobra Ridge Runner

System Type: Mechanical attachment of ridge vent.

Slot: Determine whether the rafters are truss or ridgepole construction. Chalk a cut line of each side of ridge. Cut a 1- $\frac{3}{4}$ " (no ridge board) or 3 $\frac{1}{4}$ " (ridge board) maximum slot along the apex of the roof by cutting 7/8" (no ridge board) or 1 $\frac{5}{8}$ " (ridge board) on each side of the ridge. The slot shall terminate 1 foot shorter at each end than the total length of ridge vent used.

Installation: Place, center and conform the end of a piece of ridge vent at each end of slots. Mark the location of the end of the baffle. Strike a chalk line on both sides of the ridge to produce baffle alignment. Place vent sections centered over the slot using a chalk line. Place nails at pre-marked locations on the. Nails shall be minimum 11 guage 2 $\frac{3}{8}$ " corrosion resistant smooth shank roofing nails, a minimum $\frac{3}{4}$ " penetration into wood substrate is required.

Ridge Shingle: Using nail lines provided on top of vent. Nail cap shingles in place with a 5" exposure through vent using 2 nails. Nails shall be minimum 11 guage 2 $\frac{3}{8}$ " corrosion resistant smooth shank roofing nails, a minimum $\frac{3}{4}$ " penetration into wood substrate is required.

Ventilation Calculations: Refer to manufacturer's published literature


LIMITATIONS:

1. Refer to applicable Building Code required ventilation.
2. Ridge Vent shall comply with applicable Building Code.
3. Ridge Vent shall not be installed on roof mean heights greater than 33 feet.



NOA No.: 12-0718.03
Expiration Date: 11/01/17
Approval Date: 10/18/12
Page 3 of 4

DETAIL A

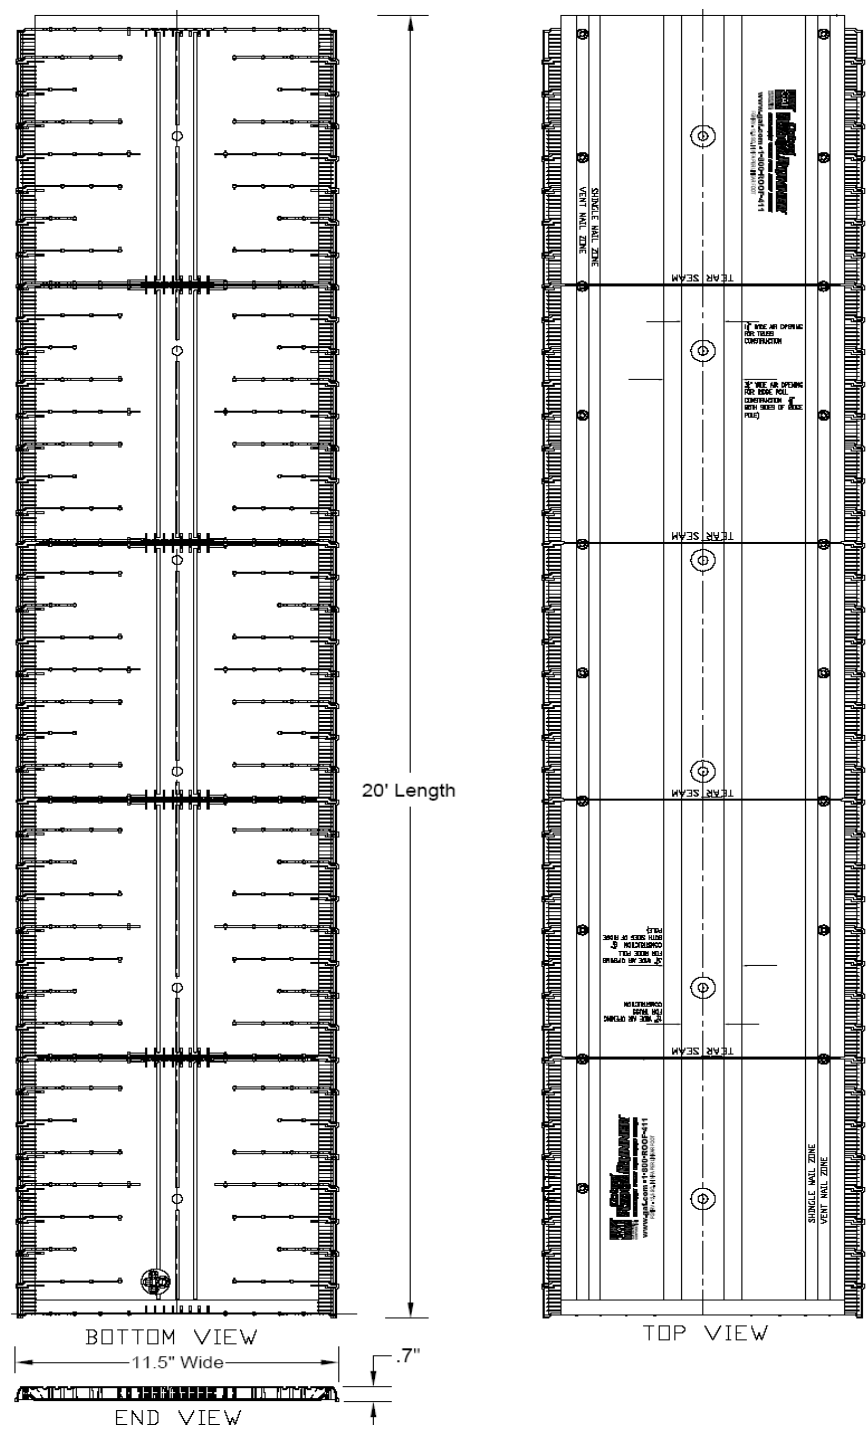

END OF THIS ACCEPTANCE